HTC-9000/HTC-2001 Series Controller


H.O.T

HTC-9000/9050/9100:





Overall Dimension Drawing:

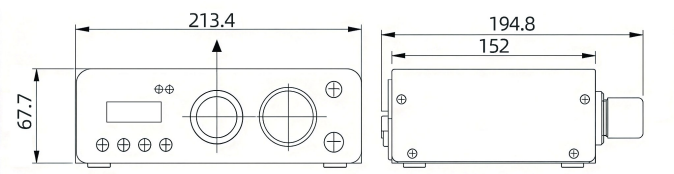

Specifications:

Name:	9000	9050	9100
Dimension:	L214*W195*H68mm		
Power Supply:	AC220V,50/60Hz,with fuse 2A		
Air Pressure Range:	0-650Kpa		
Retraction Accuracy:	±0.5μL~10μL	±0.5μL~10μL	±0.5μL~10μL
Dispensing Accuracy:	0.001mg-0.1mg		
Digital Display:	Visible, time range: 0ms ~ 60000ms		
Operating Temperature:	-20℃-70℃		
Weight:	2.2kg		
Output Air Pressure:	+6.2KPa		

Feature:

Accurate fluid output control through precise regulation of air pressure and dispensing time. Simple operation and convenient installation.


Applicable adhesive:

Compatible with various types of fluid adhesives.

HTC-2001/2002/2003:



Overall Dimension Drawing:

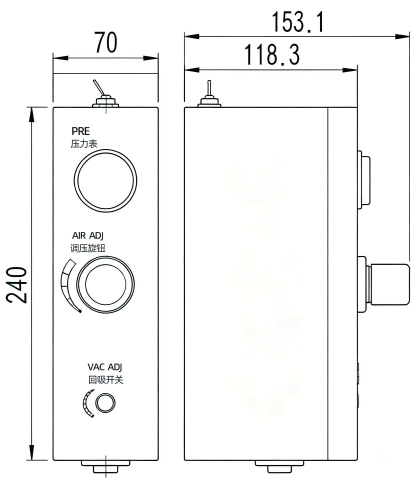

Feature:

Adopts high-precision stepper motor to achieve minimal displacement error. Precise output control of fluid adhesives. Simple operation and easy installation.

Applicable adhesive:

Compatible with various instant adhesives, quick-set adhesives, electrolyte solutions, printing inks, medicinal liquids and other fluids.

Specifications:

Name:	2001	2002	2003
Retraction Accuracy:	±0.5μL~10μL	±0.5μL~10μL	±0.5μL~10μL
Dispensing Accuracy:	0.001mg-0.1mg		
Operating Temperature:	Temperature: -5℃ ~ 40℃; Humidity: < 80%		
Dimension:	L70*W153*H240mm		
Control Mode:	Glue barrel	Valve control	Valve & barre
Weight:	2KG		

Hotwin Technology Co.,Ltd

Website: www.hotwintech.com E-mail: sales@hotwintech.com Tel: +86 755-2919 8013