
# HTV-PL01/PL02/PL03
# Plunger Dispensing Valve

H.O.T

## Product Description:

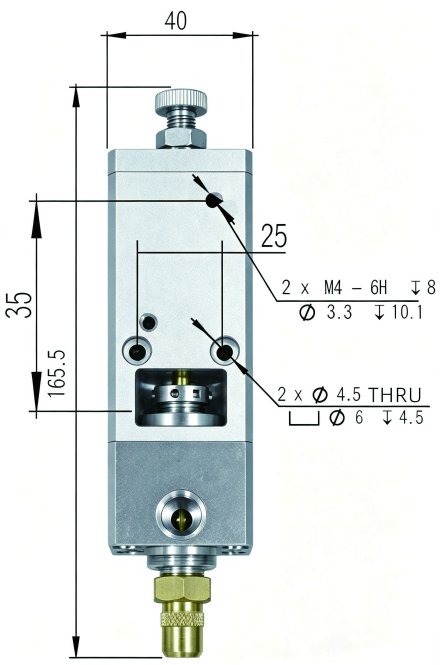


## Application:

Bonding, sealing, fixing, potting, line dispensing, reinforcement.

## Feature:

Suitable for precision dispensing of medium and high-viscosity fluids. The size of the glue passage can be adjusted by stroke control. It features adjustable flow rate, clean cut-off and easy maintenance.


## Specifications:

| Model: | HTV-PL01 | HTV-PL02 |
|---|---|---|
| Structure: | Plunger Type | |
| Flow Adjustment: | Mechanical | |
| Glue Viscosity: | 1000-1000000cps | |
| Mode: | Machine mounted/Manual | |
| Air Pressure: | 0.4-0.7Mpa | |
| Operating Speed: | <300/min | |
| Material: | 304 Stainless steel; Tungsten steel | |
| Dimension: | 40*33.5*165.5mm | 40*33.5*165.5mm |
| Inlet Port Siz: | PT1/4 | |
| Minimum Flow: | 0.3ml | 0.05ml |

## Applicable adhesive:

Silicone adhesive, UV glue, epoxy resin, polyurethane, thermal conductive adhesive and so on Minimum Flow.

## Product Description:

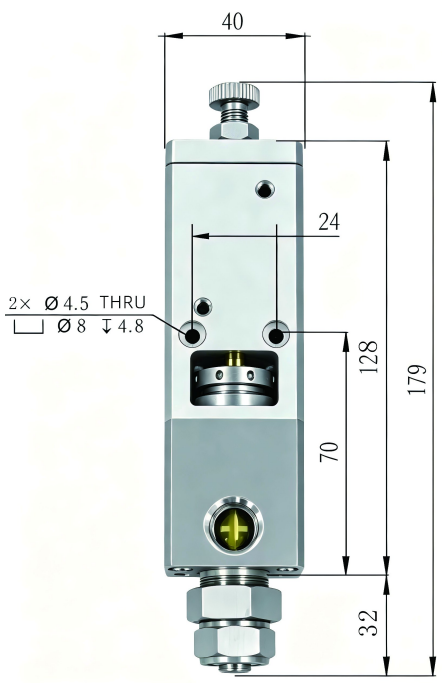


## Application:

Bonding, sealing, fixing, potting, line dispensing, reinforcement.

## Feature:

Suitable for precision dispensing of medium and high-viscosity fluids. The size of the glue passage can be adjusted by stroke control. It features adjustable flow rate, clean cut-off and easy maintenance.

## Specifications:

| Model: | HTV-PL03 |
|---|---|
| Structure: | Plunger Type |
| Flow Adjustment: | Mechanical |
| Glue Viscosity: | 1000-1000000cps |
| Mode: | Machine mounted/Manual |
| Air Pressure: | 0.4-0.7Mpa |
| Operating Speed: | <300/min |
| Material: | 304 Stainless steel; Tungsten steel |
| Dimension: | 33*40*179mm |
| Inlet Port Siz: | PT1/4 |
| Minimum Flow: | 0.5ml |

## Applicable adhesive:

Silicone adhesive, UV glue, epoxy resin, polyurethane, thermal conductive adhesive and so on.


Hotwin Technology Co.,Ltd

Website: www.hotwintech.com E-mail: sales@hotwintech.com Tel: +86 755-2919 8013