
HTV-RE01/HTV-RE02
Retraction Dispensing Valve

H.O.T

Product Description:

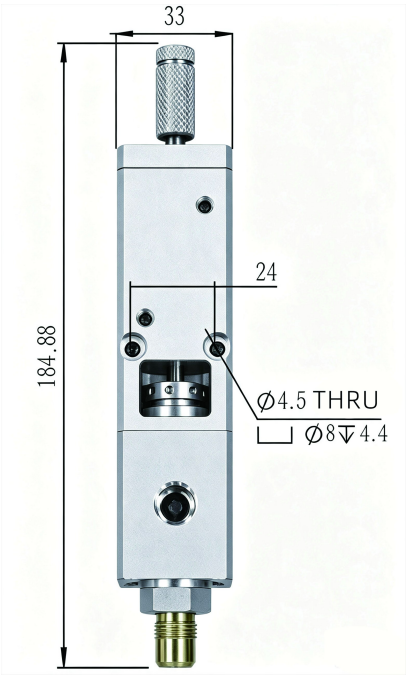

Application:

Bonding, sealing, fixing, potting, line dispensing, reinforcement etc.

Feature:

Suitable for large-volume dispensing of medium and high viscosity fluids. Dispensing speed and volume can be adjusted as required. All liquid contact components are made of corrosion-resistant materials. Features anti suck-back function, flow regulation, and features easy installation and simple maintenance.


Specifications:

Model:	HTV-RE01
Structure:	Retraction Type
Flow Adjustment:	Mechanical
Glue Viscosity:	1000-100000cps
Mode:	Machine mounted/Manual
Air Pressure:	0.4-0.7Mpa
Operating Speed:	<300/min
Material:	304 Stainless steel; Tungsten steel
Dimension:	51*31*185mm
Inlet Port Siz:	PT1/4
Minimum Flow:	0.3ml

Applicable adhesive:

Silicone adhesive, UV glue, epoxy resin, polyurethane, thermal conductive adhesive and so on.

Product Description:

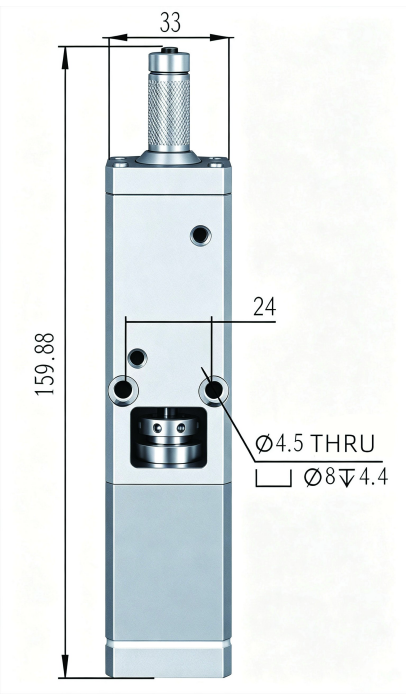

Application:

Bonding, sealing, fixing, potting, line dispensing, reinforcement.

Feature:

Suitable for large-volume dispensing of medium and high viscosity fluids. Dispensing speed and volume can be adjusted as required. All liquid contact components are made of corrosion-resistant materials. This valve features anti suck-back function, flow regulation, and features easy installation and simple maintenance.

Specifications:

Model:	HTV-RE02
Structure:	Retraction Type
Flow Adjustment:	Mechanical
Glue Viscosity:	1000-100000cps
Mode:	Machine mounted/Manual
Air Pressure:	0.4-0.7Mpa
Operating Speed:	<300/min
Material:	304 Stainless steel; Tungsten steel
Dimension:	51*33*160mm
Inlet Port Siz:	PT1/4
Minimum Flow:	0.3ml

Applicable adhesive:

Silicone adhesive, UV glue, epoxy resin, polyurethane, thermal conductive adhesive and so on.

Hotwin Technology Co.,Ltd

Website: www.hotwintech.com E-mail: sales@hotwintech.com Tel: +86 755-2919 8013