
HTV-ST03/HTV-DY05

Static Dispensing Valve/Dynamic Dispensing Valve

H.O.T

Product Description:

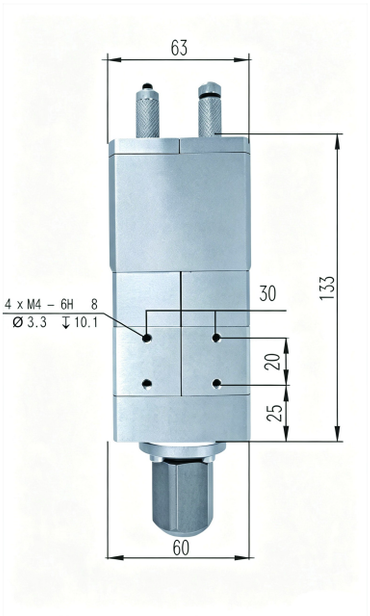

Applicable adhesive:

Suitable for two-component adhesives with slight viscosity difference and close mixing ratio.


Feature:

Compatible with various mixing ratios of adhesives. Adopting retraction mode to avoid stringing, dripping and leakage. Simple operation and easy installation.

Specifications:

Model:	HTV-ST03
Structure:	Retraction Type
Retractive force:	Adjustable
Control Mode:	Double Acting
Inlet Port Size:	1/4 Thread Port
Air Pressure:	0.5-0.7Mpa
Dispensing Volume:	≥0.1(ml)
Operating Speed:	<120/min
Material:	Aluminum Alloy, 304 Stainless Steel
Dimension:	63*40*214.5mm
Weight:	2.1Kg

Product Description:

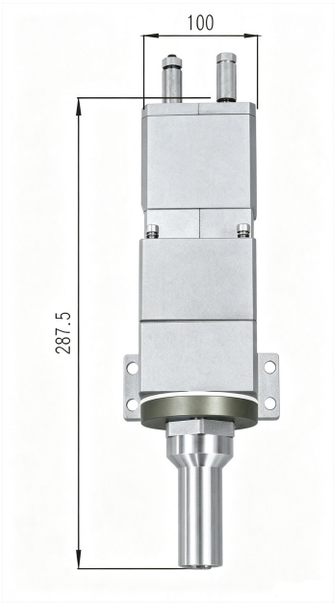

Applicable adhesive:

Suitable for two-component adhesives with large viscosity difference, disparate mixing ratio, fast dispensing speed and high mixing requirements.

Feature:

Compatible with various mixing ratios of adhesives. Adopting retraction mode to avoid stringing, dripping and leakage. Supports dynamic inspection function.

Specifications:

Model:	HTV-DY05
Structure:	Retraction Type
Retractive force:	Adjustable
Control Mode:	Double Acting
Inlet Port Size:	1/4 Thread Port
Air Pressure:	0.5-0.7Mpa
Dispensing Volume:	≥0.1(ml)
Operating Speed:	<120/min
Material:	Aluminum Alloy, 304 Stainless Steel
Dimension:	287.5*85.5*100mmmm
Weight:	2.1Kg

Hotwin Technology Co.,Ltd

Website: www.hotwintech.com E-mail: sales@hotwintech.com Tel: +86 755-2919 8013